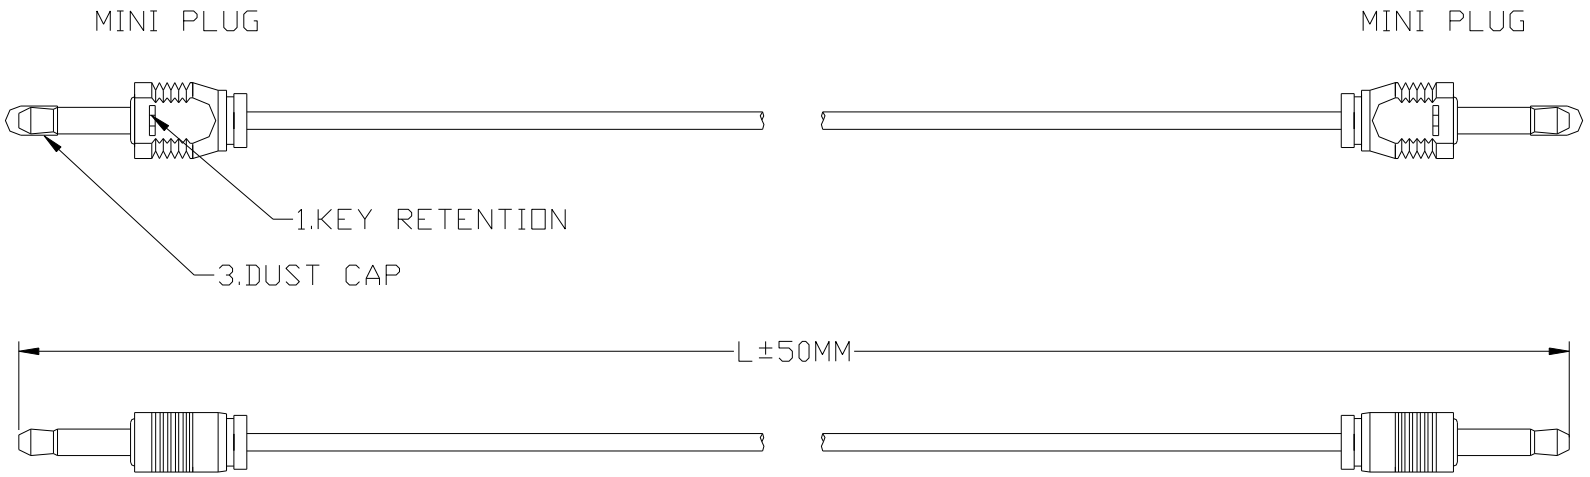

NOTE:

1.Fibe Opeical Cable:
- 1.1 Center Core: Diameter:1.0±0.05mm
- 1.2 Ineulator:
  - a.Material: Non-Flammable P/C
  - b,Diameter: 2.20±0.1mm
- 1.3 Tap: Paper Tape W:(12±3mm)
- 1.4 Outer Sheagh:
  - Material: (1)3.80±0.25mm
    (2)Customer Spec
  - * Material: 90P Soft PVC(50g/50±C 24Frs,ABS Test pass)
  - * Diameter: (1)3.85±0.25mm (2)5.0±0.25mm
    (3)6.0±0.25mm (4)Customer's Spec

2. Characteristics:(¤Jp: 660mm)
   Transmission Loss: 2dB or less

3. Fiber Optic Flexing Strength
   - a.Weight: 50g
   - b.Bnding angle:±45°
   - c.15-20 Times/min
   - d.Apply for 1.000 times

4. COLOR:BLACK

ITEM NO. & LENGTH

ITEM NO.	LENGTH
502-89	1.0M
502-90	3.0M

MINI PLUG

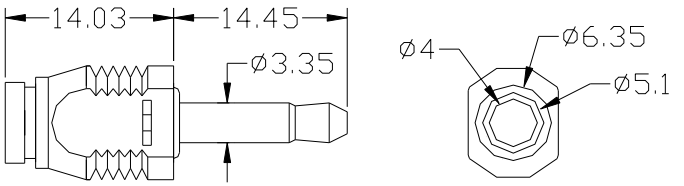

File no 502-89		Date 15 MAR,2002		Scale 1/1	Unit mm	Rev. V1.0	Drawing
Dwg.no 502-89 502-90		Buyer SBG		TITLE: MINI PLUG TO MINI PLUG CABLE			
Drawn by	Checked by	Approve by	Buyer CFM.				
				(ªF²ð) ¦w ¹F ¹q ¤l ¼t ON-TECH ELECTRON C FACTORY(CH NA)			